



## High Speed Gas Fired Boiler 10-65 Kg Q345R Steel Plate Material High Efficiency

Our Product Introduction

for more products please visit us on [newarrivals2025.com](http://newarrivals2025.com)

### Basic Information

- Place of Origin: CHINA
- Brand Name: OEM
- Certification: CE Certification
- Model Number: OEM
- Minimum Order Quantity: Negotiable
- Price: Negotiable
- Packaging Details: Carton, pallet, wooden case or according to customer's package requirements
- Delivery Time: 30 working days
- Payment Terms: 30% deposit + 70% T/T before shipping
- Supply Ability: 20 sets per month



### Product Specification

- Product Name: Series Industrial Gas Fired Steam Boiler With CE Identification
- Capacity: 10-65kg
- Fuel: Light Oil
- Material: Q345R Steel Plate
- Rated Working Pressure: 1.0Mpa /1.25Mpa
- Structure: Fire Tube
- Dimension(l\*w\*h): Depends
- After-sales Service Provided: Engineers Available To Service Machinery Overseas
- Highlight: natural gas steam boiler, lpg fired steam boiler



## Product Description

### Product Discription

#### Series Double Drum Oil and Gas Fired Steam Boiler

Two double double boiler and boiler temperature coil, T is vertical, there are high-speed boiler SZS. break type of the windows of the upper and lower plate of the tube, and can include a capacitor. Oh, from the transfer tube to electronic broadcast pearl and burning fuel in the heat exchanger tubes. Industrial electrical work in China's future.

### Product Features

#### 1. Do not apply for all fuels:

The area is great and clean fuel combustion. Such as gas ovens and blast furnaces that are suitable for low-temperature aeration. Calories on clean fuels, such as gas consumption, gas and burning.

#### 2. Load:

Oven, heat a large area, a high yield a sufficient storage capacity.

#### 3. effective structure:

Control pan head placed in front of the front wall of the water helps to reduce heat and water savings, to ensure that the cold, consists of a burner. Kitchen mixing and combustion.

#### 4. Easy to hold:


Floor blast doors, walls covered with fire pit and watch the door. Before and after the heating boiler cabinet boiler protection to ensure that the opened packaging.

#### 5. The reduced calorie reduction:

Thick texture and reduces the heat loss and increase pan heat.

#### 6. long life:

This is to ensure the quality of the pot, and for monitoring and quality control operations in a professional design, advanced technology. There was a kitchen, a service provider for 20 years.

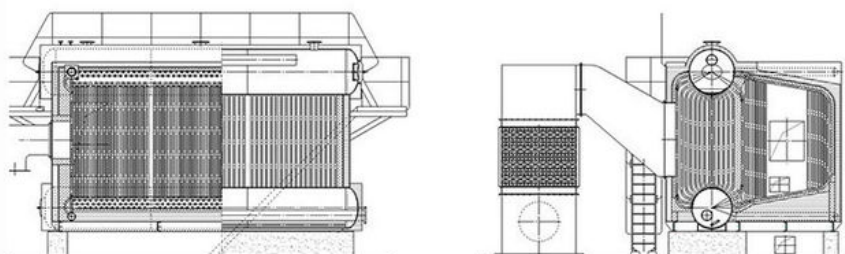

### Technical Parameters

#### Main Parameters of Series Oil & Gas Fired Steam Boiler

Steam Capacity		t/h	10	15	20	25	35	50	65
Working Pressure		MPa	1.25/1.6	1.25/1.6	1.25/1.6	1.25/1.6	1.25/1.6	1.6/2.5	1.6/2.5
Steam Temperature			193/204	193/204	193/204	193/204	193/204	204/226	204/226
Feed Water Temperature			104	104	104	104	104	104	104
Thermal Efficiency		/	≥98%						
Fuel		/	Natural Gas, Liquefied Gas, City Gas, Light Oil						
Fuel Consumption	Natural Gas	NM <sup>3</sup> /h	733	1098	1464	1829	2559	3662	4769
	Liquefied Gas	Kg/h	588	883	1173	1469	2053	2937	3823
	City Gas	NM <sup>3</sup> /h	1573	2362	3143	3945	5503	7877	10222
	Light Oil	Kg/h	601	898	1197	1496	2093	2997	3893
Gas Inlet Pressure	Natural Gas	Mbar	150-200	150-300	150-300	150-300	150-300	150-300	150-300
	City Gas	Mbar	150-200	150-300	150-300	150-300	150-300	150-300	150-30

Remarks: The fuel consumption in above table are counted the low calorific value of light oil as 42915 KJ/Kg(10260Kcal/Kg), the low calorific value of natural gas as 35588 KJ/NM<sup>3</sup>(8500Kcal/NM<sup>3</sup>), the low calorific value of liquefied oil as 45998

KJ/Kg(11000Kcal/Kg), the low calorific value of city gas as 16750 KJ/NM3(4000Kcal/NM3).

Transport Dimension	L	mm	5633	6365	6665	Separat ed Transpo rt	Separat ed Transpo rt	Separat ed Transpo rt	Separated Transport
	W	mm	3300	3585	3585				
	H	mm	3400	3478	3850				
Main Steam Valve Pipe Diameter	DN	mm	150	150	200	200	250	2×150	2×150
Feed Water Valve	DN	mm	50	65	65	80	100	125	125
Drain Valve Pipe Diameter	DN	mm	40	40	50	50	50	50	50
Chimney Diameter	DN	mm	750	1000	1100	1300	1500	2000	2000

External and Interface Dimension of SZS Series Oil & Gas Fired Steam Boiler

Remarks: We will reserve rights to change the above mentioned data due to continuous policy transformation and product improvement.

 **Jinan Yinghua Outdoor Equipment Co., Ltd.**

 +8618812345678
  Puooedr@maoyt.com
  newarrivals2025.com

Room 402.Dongbao Building,No.19 Dongbao Road,Chaoyang,Beijing 201613,China