




## Low Heat Loss Gas Fired Steam Boiler Equipment For Auxiliary Packaging

Our Product Introduction

### Basic Information

- Place of Origin: CHINA
- Brand Name: OEM
- Certification: CE Certification
- Model Number: OEM
- Minimum Order Quantity: Negotiable
- Price: Negotiable
- Packaging Details: Carton, pallet, wooden case or according to customer's package requirements
- Delivery Time: 30 working days
- Payment Terms: 30% deposit + 70% T/T before shipping
- Supply Ability: 20 sets per month

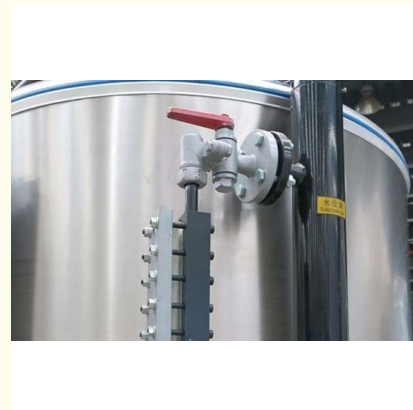

### Product Specification

- Rated Evaporation: 0.5-2T/h
- Rated Working Pressure: 0.7/1.0/1.25Mpa
- Saturated Steam Temperature: 170/193/184
- Fuel: Natural Gas/Liquefied Gas/Pipeline Gas
- Overall Size: Depend
- Weight: The Models Are Different
- Highlight: **natural gas steam boiler, lpg fired steam boiler**

for more products please visit us on [newarrivals2025.com](http://newarrivals2025.com)

## Product Description

### Series Gas Fired Steam Boiler Equipment For Auxiliary Packaging

#### Product introduction

LSS series products --water tube structure, vertical three return and burner on top design.

The boiler has controller protection and automatic recovery of the contactor to prevent electric shock function.

It also has dual anti reflux and exhaust heat protection devices, which, strengthen the safety function.

Each part of the flue gas is heat-transferred through three return strokes, which reduces the temperature of the flue gas and reduces the heat loss during boiler warm-up and shutdown.

#### Parameter

Rated evaporation		t/h	0.5	1	1.5	2
Rated working pressure		MPa	0.7/1.0	1.0/1.25	1.0/1.25	1.0/1.25
Saturated steam temperature			170/193	184/193	184/193	184/193
Fuel consumption	Light diesel oil	kg/h	35	70	105	140
	Natural gas	Nm³/h	40	80	120	160
	LPG	Nm³/h	15	30	45	60
	City gas	Nm³/h	85	170	265	340
a Main steam valve diameter		DN	40	50	65	80
b Safety valve diameter		DN	40	50	50	40×2
c Inlet diamater		DN	25	25	32	40
d Blowoff Valve diameter		DN	25	40	40	40
e Chimney diameter		DN	250	350	400	500
Overall size	L	mm	1830	1980	2045	2550
	W	mm	1780	1980	2220	2780
	H	mm	2650	3080	3380	3620
	H1	mm	2100	2300	2650	2880
	φDiameter	mm	1180	1380	1680	1980
Weight		T	1.8/2.2	2.3/2.8	3.3/4	4.3/5.2

#### Feature

- 1 . Pipe flow type, vertical three return
- 2 . The furnace starts fast
- 3 . Low exhaust gas temperature and low heat loss
- 4 . High thermal efficiency
- 5 . Various protection devices are complete



Jinan Yinghua Outdoor Equipment Co., Ltd.



+8618812345678



Puooedr@maoyt.com



[newarrivals2025.com](http://newarrivals2025.com)

Room 402.Dongbao Building,No.19 Dongbao Road,Chaoyang,Beijing 201613,China