




Even Heat Gas Fired Steam Boiler , Natural Gas Steam Boiler Small Capacity

Our Product Introduction

Basic Information

- Place of Origin: CHINA
- Brand Name: OEM
- Certification: CE Certification
- Model Number: OEM
- Minimum Order Quantity: Negotiable
- Price: Negotiable
- Packaging Details: Carton, pallet, wooden case or according to customer's package requirements
- Delivery Time: 30 working days
- Payment Terms: 30% deposit + 70% T/T before shipping
- Supply Ability: 20 sets per month

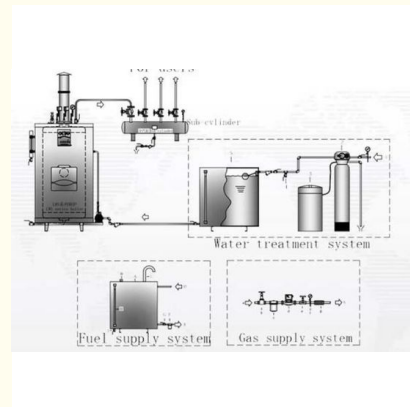

Product Specification

- Rated Evaporation: 0.1-0.3T/h
- Rated Working Pressure: 0.7Mpa
- Saturated Steam Temperature: 170
- Main Steam Valve Diameter: 25-32DN
- Safety Valve Diameter: 25DN
- Fuel Consumption: 8-24kg/h
- Highlight: **gas powered steam boiler, lpg fired steam boiler**

Product Description

Small Capacity Nature Gas Fired Steam Boiler For Sale

Product introduction

Containing no water pipes or fire tubes, which is exempt from exploding of tubes.

Boiler will not burn down because of scaling, which reduces the maintenance cost.

The upper ring large steam room and separation measures for boiler and steam blow water can ensure the availability of high-quality steam.

Double W-shaped four-pass has big heat transfer coefficient and full heat exchange.

Low exhaust temperature, high thermal efficiency and long service life.

The vertical structure is compact and beautiful, which saves space and easy for installation.

Parameter

| | | | | | | | |
|------------------------------|------------------|-------|------|------|------|------|------|
| Rated evaporation | | t/h | 0.05 | 0.1 | 0.15 | 0.2 | 0.3 |
| Rated working pressure | | MPa | 0.7 | 0.7 | 0.7 | 0.7 | 0.7 |
| Staturated steam temperature | | | 170 | 170 | 170 | 170 | 170 |
| Fuel consumption | Light diesel oil | kg/h | 3.5 | 7 | 10.5 | 14 | 21 |
| | Natural gas | Nm³/h | 4 | 8 | 12 | 16 | 24 |
| | LPG | Nm³/h | 1.5 | 3 | 4.5 | 6 | 9 |
| | City gas | Nm³/h | 8.5 | 17 | 25.5 | 34 | 51 |
| Dimension | | | | | | | |
| a Main steam valve diameter | | DN | 15 | 25 | 25 | 32 | 32 |
| b Safety valve diameter | | DN | 20 | 25 | 25 | 25 | 25 |
| c Inlet diamater | | DN | 15 | 20 | 20 | 20 | 20 |
| d Blowoff Valve diameter | | DN | 20 | 20 | 25 | 25 | 25 |
| e Chimney diameter | | DN | 100 | 120 | 150 | 150 | 200 |
| Overall size | L | mm | 870 | 1020 | 1150 | 1260 | 1270 |
| | W | mm | 930 | 1080 | 1260 | 1400 | 1570 |
| | W1 | mm | 640 | 760 | 890 | 970 | 1040 |
| | H | mm | 1660 | 1750 | 1840 | 2160 | 2400 |
| | H1 | mm | 1460 | 1480 | 1520 | 1840 | 2090 |
| | φ Diameter | mm | 630 | 750 | 880 | 960 | 1000 |
| Weight | | kg | 330 | 470 | 610 | 780 | 850 |

Advantage

- 1 . Vertical without tube
- 2 . High thermal efficiency, high quality steam
- 3 . The heat transfer effect of flue gas to the furnace water is good
- 4 . Water quality adaptability
- 5 . Safe and efficient



Jinan Yinghua Outdoor Equipment Co., Ltd.



+8618812345678



Puooedr@maoyt.com



newarrivals2025.com

Room 402.Dongbao Building, No.19 Dongbao Road, Chaoyang, Beijing 201613, China